

# Bill Fifer's Hitty Pattern

Source: [www.ATaleofTwoHittys.com/Carving-Hitty](http://www.ATaleofTwoHittys.com/Carving-Hitty)

These pattern pieces can be copied and cut out to paste onto rectangular blocks of wood for carving a Hitty. Basswood is a good wood to use. Prior to carving, drill all holes, including the 1/8" diameter holes up into the bottom of the legs for attaching the shoes. The holes for the arms and legs are drilled with a 3/16" drill bit.


**Cut wooden blocks to the following sizes:**

**Head/Torso: 1½" square by 4¼" long**


**Legs: ¾" square by 3" long**

**Arms: ⅝" square by 3" long**

**Shoes: ⅜" wide by .26" tall by 3" long**

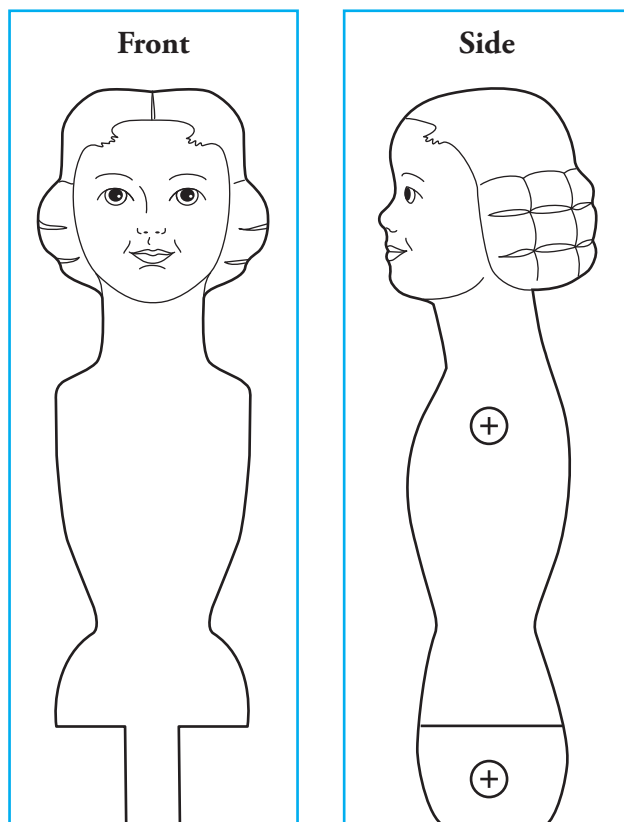


**Head/Torso**

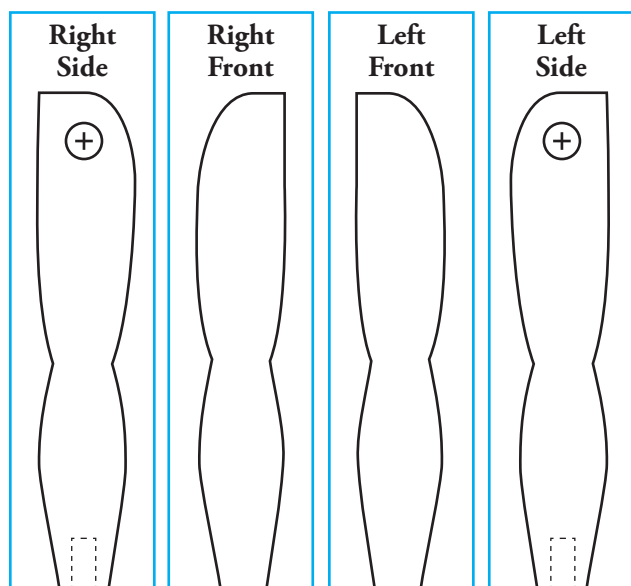


**Legs**

Drill 1/8" holes

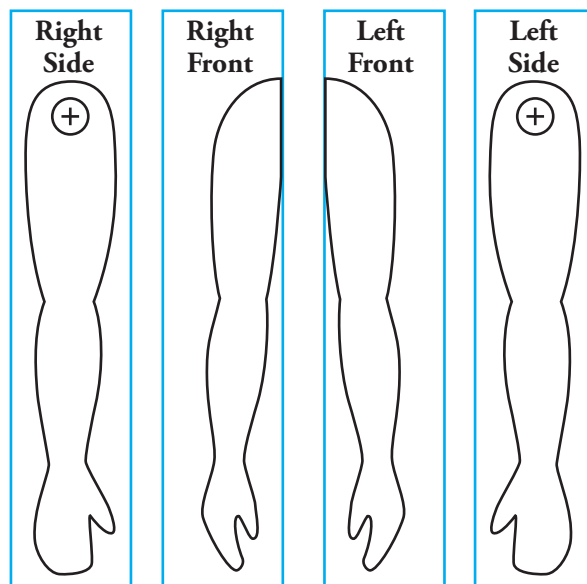

**Arms**

**Shoes:** drill the 1/8" holes a bit in from each end of the 3" long block, then cut each end to length. Use a piece of a 1/8" dowel to hold the short shoe piece while shaping – most easily done on a rotating sanding disk.

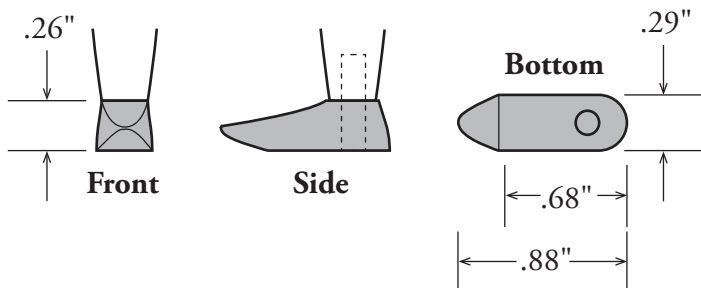

© 2025 by Wendi Dunn

This work is openly licensed via CC BY-SA 4.0 Creative Commons Attribution-ShareAlike 4.0 Intl. To view a copy of this license, visit <https://creativecommons.org/licenses/by-sa/4.0/>.